
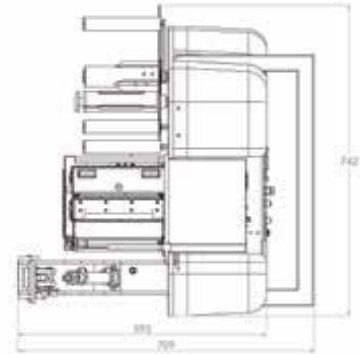

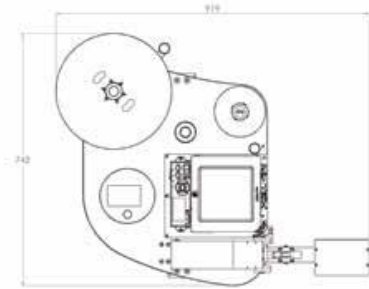



COBALT NEXUS DUAL ACTION

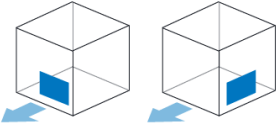

Nexus Configuration	Case/Pack labelled per min
Front or Side 	25
Front and Side 	25

Technical Specifications

- Electrical supply** – 220/240 volts single phase AC 50Hz 5amp
- Compressed air supply** – Max 6 bar, 120 litres per minute
- Weight** – 45kg
- Connectivity** – 10/100 Ethernet cat5, Serial RS232, USB 2.0, local printing via USB Memory drive, External port for PC-less firmware updates, Additional Ethernet port for remote access support, Sentinel onboard Ethernet & 15 pin D type connections for Verification and Validation modules
- Display** – Rotational LED colour touch screen, Maintenance service indicator, Multi language selection
- Label reel** – max 170mm wide, 320mm OD, 76mm core ID
- Label** – max 168mm wide, 400mm long
- Print width** – max 168mm
- Print Speed** – max 305mm per second
- Print Technology** – Thermal Transfer Ribbon & Direct Thermal
- Print resolution** – 203 & 300 dpi
- Dual Action application** – Tamp & blow to front, Tamp & Blow to side of moving cases without interrupting product flow

Options

- Floor stands** – H base 1.6M, 2M and bespoke
- Conveyor** – integrated static or variable speed, size as required, slat or belt
- Position adjustment** – Height, position indicator, Power adjust
- Status beacon** – 2 to 6 light plus audible alarm
- Sensor Pack** – Label on pad, Air pressure, low label reel
- Advanced rewind spindle** – push button collapsing fins for easy liner release
- Remote access support** – VPN or 3G
- Label & Seal** – Integrated tape sealer, choice of sealer brands
- Sentinel** – On-board barcode verification before application, barcode validation after application
- Industrial PC** – 15" HD colour graphics touch screen, Sentinel result logging & peripheral management